

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200078673 B2**  
**(10) Patent No. 782901**

**(54) Title**  
**Lubricant coating for expandable tubular members**

**(51)<sup>7</sup> International Patent Classification(s)**  
**B23P 017/02**

**(21) Application No: 200078673**

**(22) Application Date: 2000.10.05**

**(87) WIPO No: WO01/26860**

**(30) Priority Data**

<b>(31) Number</b>	<b>(32) Date</b>	<b>(33) Country</b>
<b>60/159039</b>	<b>1999.10.12</b>	<b>US</b>
<b>60/165228</b>	<b>1999.11.12</b>	<b>US</b>

**(43) Publication Date : 2001.04.23**

**(43) Publication Journal Date : 2001.07.12**

**(44) Accepted Journal Date : 2005.09.08**

**(71) Applicant(s)**  
**Shell Internationale Research Maatschappij B.V.**

**(72) Inventor(s)**  
**Lev Ring; Andrei Fillipov; Mike Cowan; Bill Dean**

**(74) Agent/Attorney**  
**Davies Collison Cave, Level 15, 1 Nicholson Street, MELBOURNE VIC 3000**

**(56) Related Art**  
**US 4573248**  
**US 4069573**

AU 200078673

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number  
WO 01/26860 A1

(51) International Patent Classification: B23P 17/02

(21) International Application Number: PCT/US00/27645

(22) International Filing Date: 5 October 2000 (05.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(74) Agents: MATTINGLY, Tod et al.; Haynes and Boone, LLP, 901 Main Street, Suite 3100, Dallas, TX 75202-3789 (US).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(30) Priority Data:  
60/159,039 12 October 1999 (12.10.1999) US  
60/165,228 12 November 1999 (12.11.1999) US


(71) Applicant (for all designated States except US): SHELL INTERNATIONAL RESEARCH, MAYS JAMES & CO. S.A., 2435 Highway 6 South, Houston, TX 77077 (US); CAROL VAN BYLANDT HAN SO, 7596 HWY The Hague (NL)

(72) Inventors; and  
(75) Inventors/Applicants (for US only): RING, Lev [US/US]; 14126 Heatherhill Place, Houston, TX 77077 (US); FILLIPOV, Andrei [US/US]; - COWAN, Mike [US/US]; - DEAN, Bill [US/US]; - 22602 Crescent Cove Court Katy TX 77494 (US)

Published:  
With international search report.  
With amended claims.

For two-letter codes and other abbreviations, refer to the "Guide to the PCT Gazette" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LUBRICANT COATING FOR EXPANDABLE TUBULAR MEMBERS

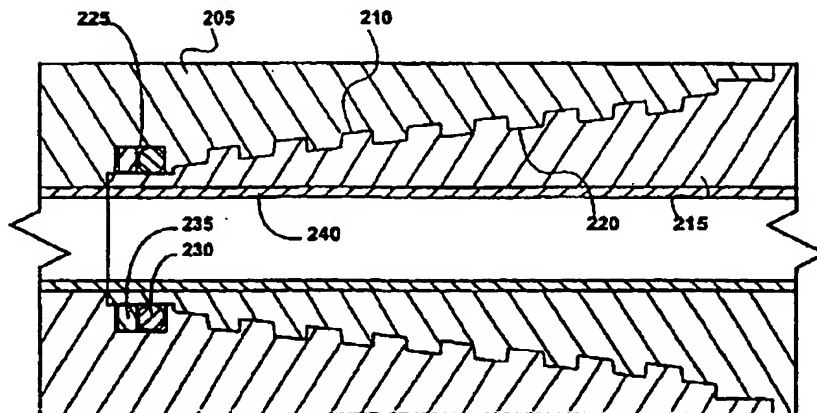

(57) Abstract: A lubricant coating (240) for expandable tubulars (215). The interior surfaces of the expandable tubulars are coated with the lubricant coating (240). The expandable tubulars (215) are then placed within a preexisting structure (205). The expandable tubulars are then radially expanded into contact with the preexisting structure.



WO 01/26860 A1

### Background of the Invention

Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

25 The present invention is directed to overcoming one or more of the limitations of the existing procedures for forming wellbores. It has been proposed to form wellbore casings using expandable tubular members, and the present invention is particularly directed to improving methods and apparatus using at least one expandable tubular member.

## Summary of the Invention

- 1 -

P:\010\081\F-19Z\000000

structure, comprising coating the interior surfaces of the at least one tubular members with a lubricant; positioning the coated at least one tubular member within a preexisting structure; and radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.

- 5 Also according to the first aspect of the present invention, an apparatus is provided that comprises a preexisting structure and at least one tubular member coupled to the preexisting structure by the process of coating the interior surface of the at least one tubular member with a lubricant; positioning the coated at least one tubular member within a preexisting structure; and radially expanding the coated at least one tubular member into  
10 contact with the preexisting structure using an expansion cone that engages the coating.

- According to a second aspect of the present invention, there is provided a method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, comprising coating the interior surface of the at least one tubular member with a first part of a lubricant; positioning the coated at least one tubular member  
15 within a preexisting structure; circulating a fluidic material including a second part of the lubricant into contact with the coating of the first part of the lubricant; and radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.

- Also according to the second aspect of the present invention, there is provided  
20 apparatus, comprising: a preexisting structure and at least one tubular member coupled to the preexisting structure by the process of coating the interior surface of the at least one tubular member with a first part of a lubricant; positioning the at least one tubular member within a preexisting structure; circulating a fluidic material having a second part of the lubricant into contact with the coating of the first part of the lubricant; and radially  
25 expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.

#### Brief Description of the Drawings

Embodiments of the present invention will now be described by way of example only, with reference to the accompanying drawings in which:

- 30 Fig. 1 is a flow chart illustrating a preferred embodiment of a method for coupling a plurality of tubular members to a preexisting structure.

P:\OFFICE\2007\100\2007\100\2007\100

Fig. 2 is cross sectional illustration of a plurality of tubular members including in internal coating of a lubricant.

Fig. 3 is a fragmentary cross sectional illustration of the radial expansion of the tubular members of Fig. 2 into contact with a preexisting structure; and

5 Fig. 4 is a flow chart illustrating an alternative preferred embodiment of a method for coupling a plurality of tubular members to a preexisting structure.

#### Detailed Description

A method and apparatus for coupling tubular members to a preexisting structure is provided. The internal surfaces of the tubular members are coated with a lubricant. The  
10 tubular members are then radially expanded into contact with a preexisting structure. In several alternative embodiments, the method and apparatus are used to form and/or repair a wellbore casing, a pipeline, or a structural support.

In Fig. 1, a preferred embodiment of a method 100 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1) providing one or  
15 more tubular members in step 105; (2) applying a lubricant coating to the interior walls of the tubular members in step 110; (3) coupling the first and second tubular members in step 115; and (4) radially expanding the tubular members into contact with the preexisting structure in step 120.

As illustrated in Fig. 2, in a preferred embodiment, in step 105, a first tubular  
20 member 205 having a first threaded portion 210 and a second tubular member 215 having a second threaded portion 220 are provided. The first and second tubular members, 205 and 215, may be any number of conventional commercially available tubular members. In a preferred embodiment, the first tubular member 205 includes a recess 225 containing a sealing member 230 and a retaining ring 235. In a preferred embodiment, the first and  
25 second tubular members, 205 and 210, are further provided substantially as disclosed in US Patent No. 6,497,289 and Australian Patent No. 767364; Australian Patent No. 770008; Australian Patent No. 771884; US Patent No. 6,328,113; US Patent No. 6,640,903; US Patent No. 6,575,240; US Patent No. 6,557,640 and Australian Patent No. 773168; US Patent No. 6,604,763 and filed as AU 37920/00; Australian Patent No. 776580; US Patent  
30 No. 6,564,875; US Patent No. 6,568,471.

In a preferred embodiment, in step 110, a coating 240 of a lubricant is applied to

COMS ID No: SBMI-01385400 Received by IP Australia: Time (H:m) 17:34 Date (Y-M-d) 2006-07-20

P:\OVERSEA\2005\7-05\20050710\20050710.doc

tubular members during storage and transport.

In a preferred embodiment, the coating 240 of lubricant includes sodium, calcium, and/or zinc stearates; and/or zinc and/or manganese phosphates; and/or C-Lube-10; and/or C-Phos-58-M; and/or C-Phos-58-R; and/or polytetrafluoroethylene (PTFE); and/or molybdenum disulfide; and/or metallic soaps (stearates, oleates, etc...) in order to optimally provide a coating of lubricant. In a preferred embodiment, the coating 240 of lubricant provides a sliding coefficient of friction less than about 0.20 in order to optimally reduce the force required to radially expand the tubular members, 205 and 215, using an expansion cone.

10 In a preferred embodiment, in step 115, the first and second tubular members, 205 and 215, are coupled. The first and second tubular members, 205 and 215, may be coupled using a threaded connection, or, alternatively, the first and second tubular members, 205 and 215, may be coupled by welding or brazing. In a preferred embodiment, the first and second tubular members, 205 and 215, are coupled substantially as disclosed in the above  
15 US and Australian patent specifications.

As illustrated in Fig. 3, in steps 120, the first and second tubular members 205 and 215 are then positioned within a preexisting structure 505, and radially expanded into contact with the interior walls of the preexisting structure 505 using an expansion cone 510. The tubular members 205 and 215 may be radially expanded into intimate contact  
20 with the interior walls of the preexisting structure 505, for example, by: (1) pushing or pulling the expansion cone 510 through the interior of the tubular members 205 and 215; and/or (2) pressurizing the region within the tubular members 205 and 215 behind the expansion cone 510 with a fluid. In a preferred embodiment, one or more sealing members 515 are further provided on the outer surface of the tubular members 205 and 215, in order  
25 to optimally seal the interface between the radially expanded tubular members 205 and 215 and the interior walls of the preexisting structure 505.

In a preferred embodiment, the radial expansion of the tubular members 205 and 215 into contact with the interior walls of the preexisting structure 505 is performed substantially as disclosed in one or more of the above US and Australian Patent  
30 specification.

As illustrated in Fig. 4, an alternative embodiment of a method 400 for forming and/or repairing a wellbore casing, pipeline, or structural support includes the steps of: (1)





P:\OFFICE\2005\07\11\20-07-05\20-07-05.doc

- (4) a liquid lubricant viscosity and/or film strength that provides effective, consistent boundary lubrication typically limits the effectiveness of additives for the mud alone to provide the necessary lubrication while maintaining drilling fluid properties (rheology, toxicity);
- 5 (5) consistent reductions of 20 to 25 percent in propagation force during the radial expansion process (compared to uncoated expandable tubular control results) were obtained with the following dry film coatings: (1) polytetrafluoroethylene (PTFE), (2) molybdenum disulfide, and (3) metallic soap (stearates), these results are for laboratory tests on one inch dry pipe, in the absence of any drilling fluid;
- 10 (6) a 20 to 25 percent reduction in propagation force during the radial expansion process was observed;
- (7) synthetic oil muds do not typically provide sufficient, reliable lubrication for uncoated pipe;
- 15 (8) the coefficient of friction for expandable tubular lubricant coatings remains essentially constant across a wide temperature range;
- (9) the expected application range for expandable tubular casing expansion is between 40° F and 400°F (4 to 204°C), this range is well within the essentially constant range for coefficient of friction for good coatings; and
- 20 (10) good extreme pressure boundary lubricants have a characteristic of performing better (lower coefficients of friction) as the load increases, coefficients of friction between 0.02 and 0.08 are reported for some coatings.

In a preferred embodiment, the optimum lubrication for in-situ expandable tubular radial expansion operations using the methods 100 and/or 400 includes a combination of lubrication techniques and lubricants. These can be summarized as follows: (1) extreme pressure lubricants/lubrication techniques; and (2) hydrodynamic lubrication from the fluid in the pipe during expansion.

Extremc pressure lubrication is preferably provided by: (1) liquid extreme pressure lubricants added to the fluid (e.g., drilling fluid, etc) in contact with the internal surface of the expandable tubular during the radial expansion process, and/or (2) solid lubricants added to, or contained within, the fluid in contact with the internal surface of the

F:\IP\05\081\081-08 Description.doc-20070720

expandable tubular member during the radial expansion process, and/or (3) solid lubricants applied to the internal surface of the expandable tubular member to be radially expanded, and/or (4) combinations of (1), (2) and (3) above.

Liquid extreme pressure lubricant additives preferably work by chemically adhering to or being strongly attracted to the surface of the expandable tubular to be expanded. These types of liquid extreme pressure lubricant additives preferably form a 'film' on the surface of the expandable tubular member. The adhesive strength of this film is preferably greater than the shearing force along the internal surface of the expandable tubular member during the radial expansion process. This adhesive force is referred to as film strength. The film strength can be increased by increasing the viscosity of the fluid. Common viscosifiers, such as polymeric additives, are preferably added to the fluid in contact with the internal surface of the expandable tubular member during the radial expansion process to increase lubrication. In a preferred embodiment, these liquid extreme pressure lubricant additives include one or more of the following: polyacrylamide polymers, AMPS-acrylamide copolymers, modified cellulose derivatives such as, for example, hydroxyethylcellulose, carboxymethylhydroxyethyl cellulose, polyvinyl alcohol polymers, polyvinyl acetate polymers, polyvinyl alcohol/vinyl acetate copolymers, polyvinyl pyrrolidone and copolymers including polyolefins, latexes such as, for example, styrene butadiene latex, urethane latexes, styrene-maleic anhydride copolymers, viscosity index improvers for motor oils such as polyacrylate esters, block copolymers including styrene, isoprene butadiene and ethylene, ethylene acrylic acid copolymers.

In a preferred embodiment, extreme pressure lubrication is provided using solid lubricants that are applied to the internal surface of the expandable tubular member. These solid lubricants can be applied using various conventional methods of applying a film to a surface. In a preferred embodiment, these solid lubricants are applied in a manner that ensures that the solid lubricants remain on the surface of the expandable tubular member during installation and radial expansion of the expandable tubular member. The solid lubricants preferably include one or more of the following: graphite, molybdenum disulfide, lead powder, antimony oxide, poly tetrafluoroethylene (PTFE), or silicone polymers. Furthermore, blends of these solid lubricants are preferred.

In a preferred embodiment, the solid lubricants are applied directly to the expandable tubulars as coatings. The coating of the solid lubricant preferably includes a

P:\COMS\IP\2005\2005-07-20\2005-07-20-17:12

binder to help hold or fix the solid lubricant to the expandable tubular. The binders preferably include curable resins such as, for example, epoxies, acrylic, urea-formaldehyde, melamine formaldehyde, furan based resins, acetone formaldehyde, phenolic, alkyd resins, silicone modified alkyd resins, etc. The binder is preferably selected to withstand the expected temperature range, pH, salinity and fluid types during the installation and radial expansion operations. Polymeric materials are preferably used to bind the solid lubricants to the expandable tubular such as, for example, "self-adhesive" polymers such as those copolymers or terpolymers based upon vinyl acetate, vinyl chloride, maleic anhydride/maleic acid, and ethylene-acrylic acid copolymers, ethylene-methacrylic acid copolymers and ethylene-vinyl acetate copolymers. In an alternative embodiment, the solid lubricants are applied as suspensions of fine particles in a carrier solvent without the presence/use of a chemical binder.

In a preferred embodiment, the solid lubricant coating and the liquid lubricant additive (added to the fluid in contact with the internal surface of the expandable tubular member during the radial expansion process) interact during the radial expansion process to improve the overall lubrication. In an exemplary embodiment, for phosphate solid lubricant coatings, manganese phosphate is preferred over zinc or iron phosphate because it more effectively attracts and retains liquid lubricant additives such as oils, esters, amides, etc.

In a preferred embodiment, solid lubricant coatings use binders that provide low friction that is enhanced under extreme pressure conditions by the presence of the solid lubricant. Preferred solid lubricant coatings includes one or more of the following: graphite, molybdenum disulfide, silicone polymers and polytetrafluoroethylene (PTFE). In a preferred embodiment, blends of these materials are used since each material has lubrication characteristics that optimally work at different stages in the radial expansion process. In a preferred embodiment, a solid, dry film lubricant coating for the internal surface of the expandable tubular includes: (1) 1 to 90 percent solids by volume; (2) more preferably, 5 to 70 percent solids by volume; and (3) most preferably, 15 to 50 percent solids by volume. In a preferred embodiment, the solid lubricants include: (1) 5 to 80 percent graphite; (2) 5 to 80 percent molybdenum disulfide; (3) 1 to 40 percent PTFE; and (4) 1 to 40 percent silicone polymers.

P018/081 F-142

In several exemplary embodiment, the liquid lubricant additives include one or more of the following: (1) esters including: (a) organic acid esters (preferably fatty acid esters) such as, for example, trimethylol propane, isopropyl, penterithritol, n-butyl, etc.; (b) glycerol tri (acetoxystearate) and N, N' ethylene bis 12 hydroxystearate and octyl hydroxystearate; (c) phosphate and phosphite such as, for example, butylated triphenyl phosphate and isodiphenyl phosphate; (2) sulfurized natural and synthetic oils; (3) alkanolamides such as, for example, coco diethanolamide; (4) amines and amine salts; (5) olefins and polyolefins; (6) C-8 to C-18 linear alcohols and derivatives containing or consisting of esters, amines, carboxylates, etc.; (7) overbased sulfonates such as, for example, calcium sulfonate, sodium sulfonate, magnesium sulfonate; (8) polyethylene glycols; (9) silicones and siloxanes such as, for example, dimethylpolysiloxanes and fluorosilicone derivatives; (10) dinonyl phenols; and (11) ethylene oxide/propylene oxide block copolymers.

Where a liquid lubricant is injected into contact with the expandable tubular assembly, the liquid lubricant material may be selected from: polyacrylamide polymers, AMPS-acrylamide copolymers, modified cellulose derivatives, hydroxyethylcellulose, carboxymethyl hydroxyethyl cellulose, polyvinyl alcohol polymers, polyvinyl acetate polymers, polyvinyl alcohol/vinyl acetate copolymers, polyvinyl pyrrolidone, copolymers including polyolefins, latexes, styrene butadiene latex, urethane latexes, styrene-maleic anhydride copolymers, viscosity index improvers for motor oils, polyacrylate esters, block copolymers including styrene, isoprene butadiene and ethylene, ethylene acrylic acid copolymers, esters, organic acid esters, trimethylol propane, isopropyl, penterithritol, n-butyl, glycerol triacetoxystearate, N,N' ethylene bis 12 hydroxystearate, octyl hydroxystearate, phosphate, phosphite, butylated triphenyl phosphate, isodiphenyl phosphate, sulfurized natural oils, synthetic oils, alkanolamides, coco diethanolamide, amines, amine salts, olefins, polyolefins, C-8 to C-18 linear alcohols and derivatives including esters, amines, carboxylates, overbased sulfonates, calcium sulfonate, sodium sulfonate, magnesium sulfonate, polyethylene glycols, silicones, siloxanes, dimethylpolysiloxanes, fluorosilicone derivatives, dinonyl phenols, and ethylene oxide/propylene oxide block copolymers. In a preferred embodiment, the injected lubricant material includes a solid lubricant material. In a preferred embodiment, the solid lubricant material is selected from the group consisting of: graphite, molybdenum

P2019081081 COMS IP AUSTRALIA 20050720

disulfide, lead powder, antimony oxide, poly tetrafluoroethylene, and silicone polymers. In a preferred embodiment, the method further includes: coating the interior surfaces of the tubular members with a lubricant prior to positioning the tubular members within the preexisting structure. In a preferred embodiment, the lubricant coating includes a first part  
5 of a lubricating substance; and the injected lubricating material includes a second part of the lubricating substance.

A method of coupling an expandable tubular assembly including one or more tubular members to a preexisting structure has been described that includes: coating the interior surfaces of the tubular members with a first part of a lubricant, positioning the  
10 tubular members within a preexisting structure, circulating a fluidic material including a second part of the lubricant into contact with the coating of the first part of the lubricant, and radially expanding the tubular members into contact with the preexisting structure. In a preferred embodiment, the lubricant includes a metallic soap. In a preferred embodiment, the lubricant is selected from the group consisting of sodium, calcium, and/or  
15 zinc stearates, zinc phosphates, manganese phosphate, C-Lube-10, C-PHOS-58-M, and C-PHOS-58-R. In a preferred embodiment, the lubricant provides a sliding friction coefficient of less than about 0.20. In a preferred embodiment, the first part of the lubricant is chemically bonded to the interior surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is mechanically bonded to the interior  
20 surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is adhesively bonded to the interior surface of the tubular members. In a preferred embodiment, the method further includes: combining the first and second parts of the lubricant to generate the lubricant.

Apparatus has been described that includes a preexisting structure and one or more  
25 tubular members coupled to the preexisting structure. The tubular members are coupled to the preexisting structure by the process of: coating the interior surfaces of the tubular members with a first part of a lubricant, positioning the tubular members within a preexisting structure, circulating a fluidic materials having a second part of the lubricant into contact with the coating of the first part of the lubricant, and radially expanding the  
30 tubular members into contact with the preexisting structure. In a preferred embodiment, the lubricant includes a metallic soap. In a preferred embodiment, the lubricant is selected from the group consisting of sodium, calcium, and/or zinc stearates, zinc phosphates,

P:\P020\081\F-142\T-316\T-316-081-001.doc

manganese phosphate, C-Lube-10, C-PHOS-58-M, and C-PHOS-58-R. In a preferred embodiment, the lubricant provides a sliding friction coefficient of less than about 0.20. In a preferred embodiment, the first part of the lubricant is chemically bonded to the interior surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is mechanically bonded to the interior surfaces of the tubular members. In a preferred embodiment, the first part of the lubricant is adhesively bonded to the interior surface of the tubular members. In a preferred embodiment, the apparatus further includes combining the first and second parts of the lubricant to generate the lubricant.

Although this detailed description has shown and described illustrative embodiments of the invention, this description contemplates a wide range of modifications, changes, and substitutions. In some instances, one may employ some features of the present invention without a corresponding use of the other features. Accordingly, it is appropriate that readers should construe the appended claims broadly, and in a manner consistent with the scope of the invention.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

P021/081 F-142

## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, comprising:
  - 5 coating the interior surface of the at least one tubular member with a lubricant;
  - positioning the coated at least one tubular member within a preexisting structure; and
  - radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.
- 10 2. A method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, comprising:
  - coating the interior surface of the at least one tubular member with a first part of a lubricant;
  - positioning the coated at least one tubular member within a preexisting structure;
  - 15 circulating a fluidic material including a second part of the lubricant into contact with the coating of the first part of the lubricant; and
  - radially expanding the coated at least one tubular member into contact with the preexisting structure using an expansion cone that engages the coating.
3. The method of claim 1 or 2, wherein the at least one tubular member comprises a wellbore casing.
- 20 4. The method of claim 1 or 2, wherein the at least one tubular member comprises an underground pipe.
5. The method of claim 1 or 2, wherein the at least one tubular member comprises a structural support.
- 25 6. The method of claim 1, wherein the coating of lubricant is chemically bonded to the interior surface of the at least one tubular member.
7. The method of claim 1, wherein the coating of lubricant is mechanically bonded to the interior surface of the at least one tubular member.

CONFIDENTIAL

- 95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914



P:\OFFICE\2005\2005-07-20\2005-07-20\2005-07-20

latexes, styrene-maleic anhydride copolymers, viscosity index improvers for motor oils, polyacrylate esters, block copolymers including styrene, block copolymers including isoprene butadiene, block copolymers including ethylene, and ethylene acrylic acid copolymers.

- 5 17. The method of claim 1 or 2, wherein the lubricant comprises one or more of:  
graphite, molybdenum disulfide, lead powder, antimony oxide, poly  
tetrafluoroethylene, and silicone polymers.
18. The method of claim 1, wherein the coating of lubricant comprises:  
a solid lubricant; and  
10 a binder.
19. The method of claim 18, wherein the binder is selected from:  
epoxy, acrylic, urea-formaldehyde, melamine formaldehyde, furan based resin,  
acetone formaldehyde, phenolic, alkyd resins, and silicone modified alkyd resin.
20. The method of claim 18, wherein the binder is selected from:  
15 vinyl acetate, vinyl chloride, maleic anhydride, maleic acid, ethylene-acrylic acid  
copolymers, ethylene-methacrylic acid copolymers, and ethylene-vinyl acetate  
copolymers.
21. The method of claim 1 or 2, wherein the lubricant comprises a suspension of  
particles in a carrier solvent.
- 20 22. The method of claim 1 or 2, wherein the lubricant comprises one or more of:  
manganese phosphate, zinc phosphate, and iron phosphate.
23. The method of claim 1 or 2, wherein the lubricant comprises:  
about 1 to 90 percent solids by volume.
24. The method of claim 23, wherein the lubricant comprises:  
25 about 5 to 70 percent solids by volume.
25. The method of claim 24, wherein the lubricant comprises:  
about 15 to 50 percent solids by volume.

P:\OFFICE\050705\050705-0001.doc

26. The method of claim 1 or 2, wherein the lubricant comprises:  
 about 5 to 80 percent graphite;  
 about 5 to 80 percent molybdenum disulfide;  
 about 1 to 40 percent PTFE; and  
 5 about 1 to 40 percent silicone polymers.
27. The method of claim 1 or 2, wherein the lubricant comprises one or more of:  
 ester;  
 sulfurized oil;  
 alkanolamides;  
 10 amine;  
 amine salt;  
 olefin;  
 polyolefins;  
 C-8 to C-18 linear alcohol;  
 15 derivative of C-8 to C-18 linear alcohol including ester;  
 derivative of C-8 to C-18 linear alcohol including amine;  
 derivative of C-8 to C-18 linear alcohol including carboxylate;  
 sulfonate;  
 polyethylene glycol;  
 20 silicone;  
 siloxane;  
 dinonyl phenol;  
 ethylene oxide block copolymer; and  
 propylene oxide block copolymer.
- 25 28. Apparatus, comprising:  
 a preexisting structure; and  
 at least one tubular member coupled to the preexisting structure by the process of:  
 coating the interior surface of the at least one tubular member with a lubricant;  
 positioning the coated at least one tubular member within a preexisting structure;  
 30 and  
 radially expanding the coated at least one tubular member into contact with the

PROCESSED BY THE SECRETARY OF DEFENSE

preexisting structure using an expansion cone that engages the coating.

29. Apparatus, comprising:  
 a preexisting structure; and  
 at least one tubular member coupled to the preexisting structure by the process of:  
 5 coating the interior surface of the at least one tubular member with a first part of a  
 lubricant;  
 positioning the at least one tubular member within a preexisting structure;  
 circulating a fluidic material having a second part of the lubricant into contact with  
 the coating of the first part of the lubricant; and  
 10 radially expanding the coated at least one tubular member into contact with the  
 preexisting structure using an expansion cone that engages the coating.
30. The apparatus of claim 28 or 29, wherein the at least one tubular member  
 comprises a wellbore casing.
31. The apparatus of claim 28 or 29, wherein the at least one tubular member  
 15 comprises an underground pipe.
32. The apparatus of claim 28 or 29, wherein the at least one tubular member  
 comprises a structural support.
33. The apparatus of claim 28, wherein the coating of lubricant is chemically bonded to  
 the interior surface of the at least one tubular member.
- 20 34. The apparatus of claim 28, wherein the coating of lubricant is mechanically bonded  
 to the interior surface of the at least one tubular member.
35. The apparatus of claim 28, wherein the coating of lubricant is adhesively bonded to  
 the interior surface of the at least one tubular member.
36. The apparatus of claim 28, wherein the coating of lubricant includes:  
 25 a primer coating coupled to the interior surface of the at least one tubular member;  
 and  
 a coating of an antifriction paste coupled to the primer.



45. The apparatus of claim 28, wherein the coating of lubricant comprises:  
a solid lubricant; and  
a binder.

46. The apparatus of claim 45, wherein the binder is selected from:  
5 epoxy, acrylic, urea-formaldehyde, melamine formaldehyde, furan based resin, acetone formaldehyde, phenolic, alkyd resins, and silicone modified alkyd resin.

47. The apparatus of claim 45, wherein the binder is selected from:  
vinyl acetate, vinyl chloride, maleic anhydride, maleic acid, ethylene-acrylic acid  
copolymers, ethylene-methacrylic acid copolymers, and ethylene-vinyl acetate  
copolymers.

48. The apparatus of claim 28 or 29, wherein the lubricant comprises a suspension of particles in a carrier solvent.

49. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of: manganese phosphate, zinc phosphate, and iron phosphate.

15 50. The apparatus of claim 28 or 29, wherein the lubricant comprises:  
about 1 to 90 percent solids by volume.

51. The apparatus of claim 50, wherein the lubricant comprises:  
about 5 to 70 percent solids by volume.

52. The apparatus of claim 51, wherein the lubricant comprises:  
20 about 15 to 50 percent solids by volume.

53. The apparatus of claim 28 or 29, wherein the lubricant comprises:  
about 5 to 80 percent graphite;  
about 5 to 80 percent molybdenum disulfide;  
about 1 to 40 percent PTFE; and  
25 about 1 to 40 percent silicone polymers.

54. The apparatus of claim 28 or 29, wherein the lubricant comprises one or more of the following:

P:\OFFICE\170705\2005-07-20\2005-07-20

- ester;  
sulfurized oil;  
alkanolamides;  
amine;  
5 amine salt;  
olefin;  
polyolefins;  
C-8 to C-18 linear alcohol;  
derivative of C-8 to C-18 linear alcohol including ester;  
10 derivative of C-8 to C-18 linear alcohol including amine;  
derivative of C-8 to C-18 linear alcohol including carboxylate;  
sulfonate;  
polyethylene glycol;  
silicone;  
15 siloxane;  
dinonyl phenol;  
ethylene oxide block copolymer; and  
propylene oxide block copolymer.
- 20 55. A method of coupling an expandable tubular assembly including at least one tubular member to a preexisting structure, the method being according to claim 1 or 2, substantially as hereinbefore described with reference to the accompanying drawings.
- 25 56. Apparatus according to claim 28 or 29, substantially as hereinbefore described with reference to the accompanying drawings.

DATED this 20<sup>th</sup> day of July, 2005

Shell Internationale Research Maatschappij B.V.

By DAVIES COLLISON CAVE

30 Patent Attorneys for the Applicant

1/4

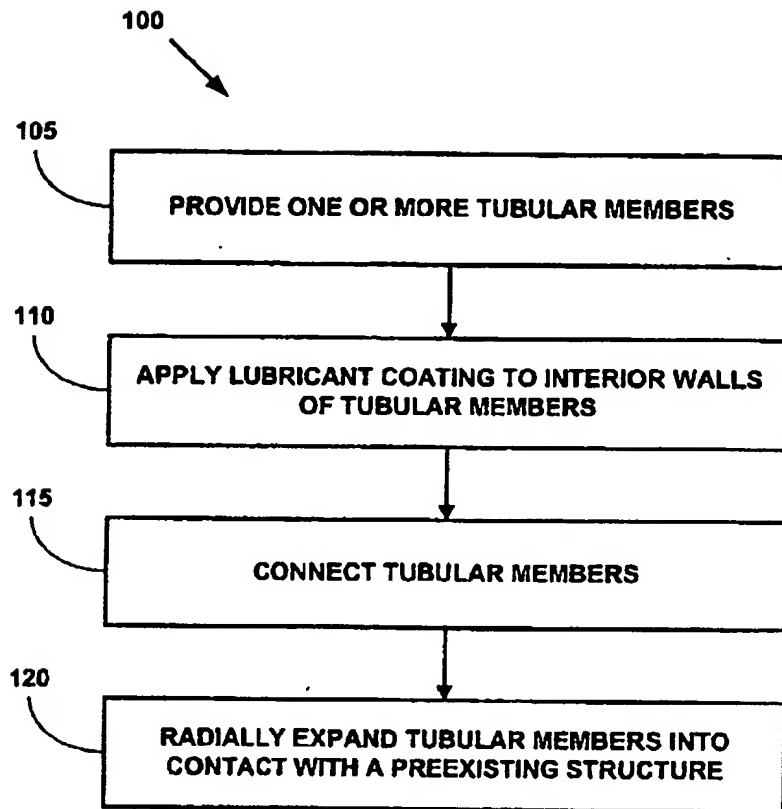


FIGURE 1

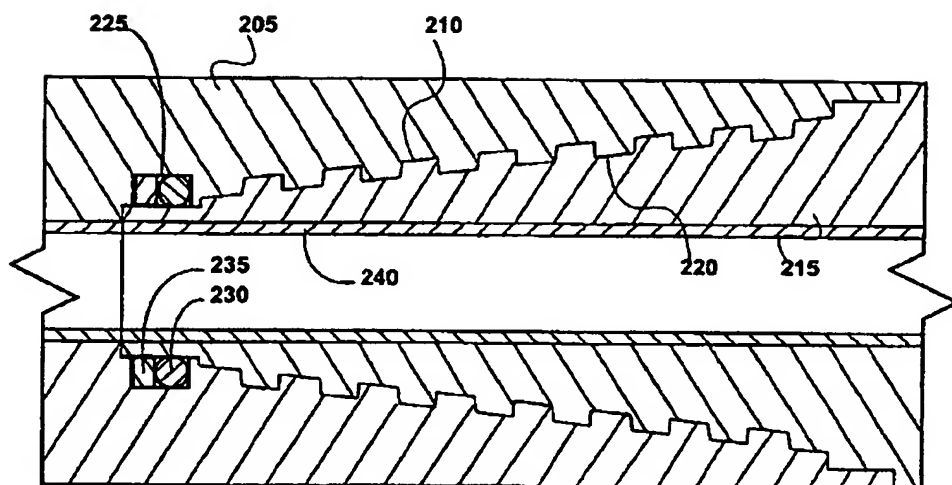


FIGURE 2



3/4

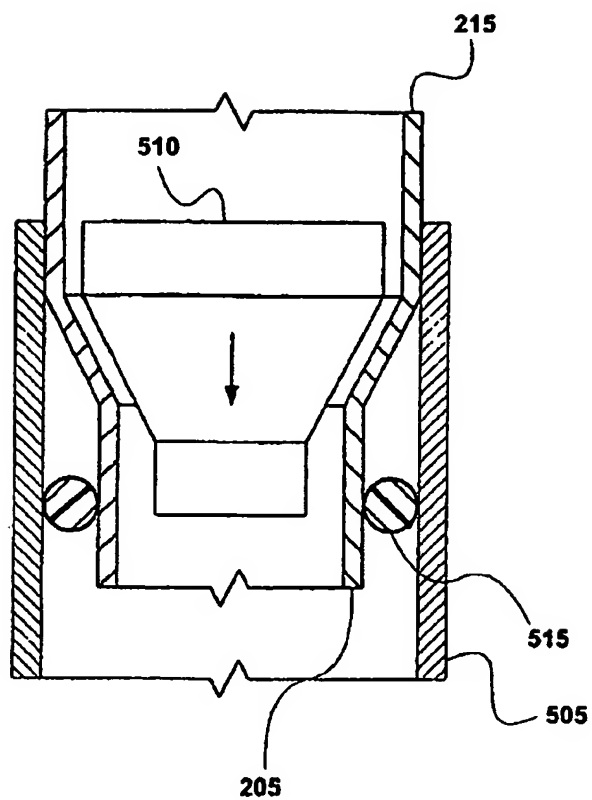


FIGURE 3

4/4

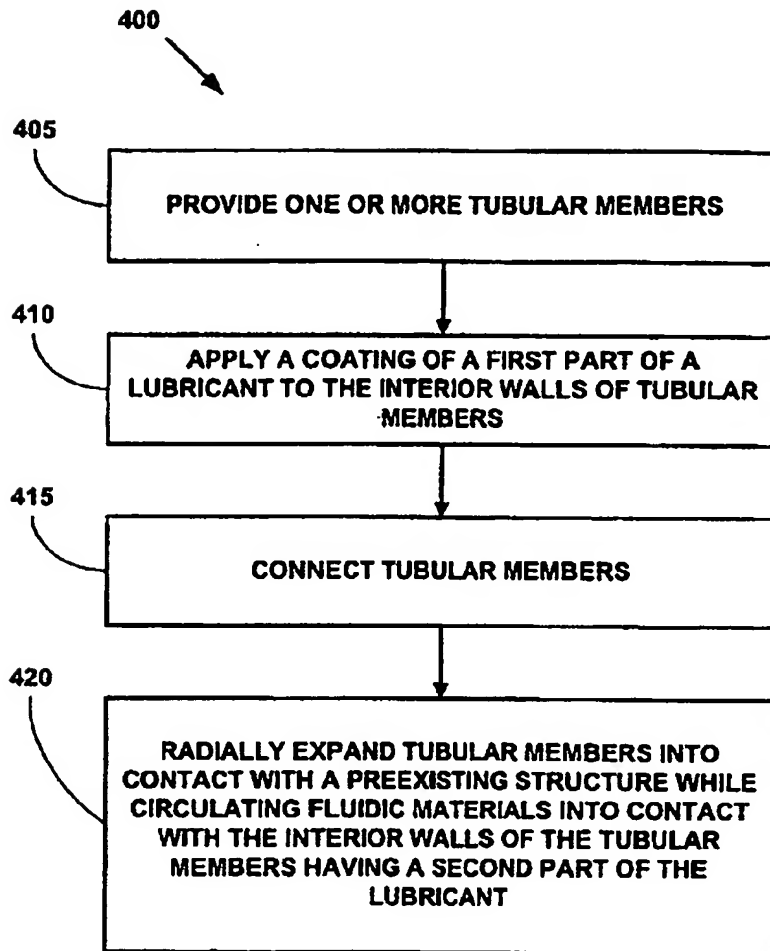


FIGURE 4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**